

FREDDY

The Blast Chiller

THE FIRST DOMESTIC
BLAST CHILLER

Freddy, a professional-standard blast chiller, is designed to fit into all standard 23.6 inches tall units.

It is convenient and practical to fit and is enhanced by an uncluttered design with no protrusions.

TECHNICAL DETAILS

- 1) Made in AISI 304 18/10 stainless steel, it merges seamlessly with any type of kitchen furniture or decor.
- 2) Freddy is operated via an easy-to-use digital interface with multiple functions. The controls are soft-touch, entirely without push buttons.
- 3) Freddy is available in stainless steel, black glass or any material from the De Castelli range.
- 4) All Freddy components comply with the most stringent international environmental, and food safety standards.




TECHNICAL SPECIFICATIONS

Blast chilling cycle output (194°F/90°C to 37.4°F/3°C)	7.7 lbs
Shock freezing cycle output (194°F/90°C to 0.4°F/18°C)	6.6 lbs
Voltage	220 - 240 V / 50 Hz
Max. absorbed power	500 W
Total current draw	2.2 A
Compressor power	0.33 Hp
Refrigerant	R290
Net machine weight	97 lbs
Total number of wire shelves	n.2

STANDARD ACCESSORIES:

- 2 Stainless steel wire shelves
- Core probe
- Hygienizing spray
- 1 microfibre cloth.

FREDDY 45 BUILT IN

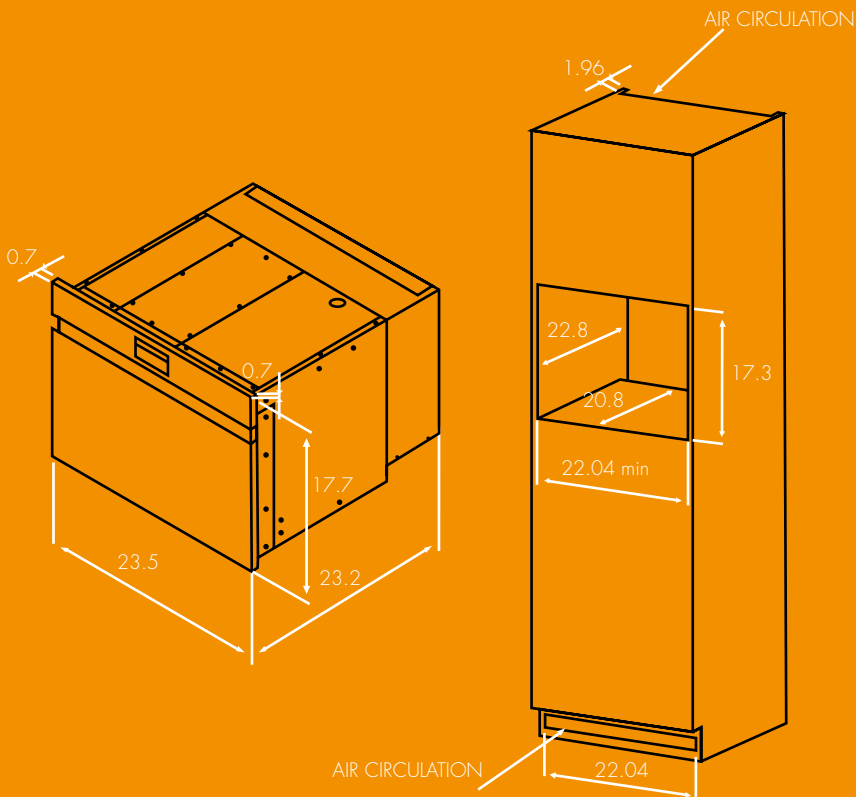

Freddy 45

DIMENSIONS

Min W. 23.5 inches
Min D. 23.2 inches
Min H. 17.7 inches

INSTALLATION REQUIREMENTS

The appliance comes with a power cord (2 m long).

Make sure there is at least 50 mm clearance at the top of the cavity. Fit the appliance away from heat sources, ovens or appliances that produce heat.

Provide a Schuko socket behind the appliance.

FINISHES

All Freddy models can be customized with the following finishes: satin stainless steel, black glass, fronts in a variety of materials, and in any colour of the RAL range.

It is convenient and practical to fit and is enhanced by an uncluttered design with no protrusions.