

# ZERO

## The Vacuum Sealer

BUILT-IN VACUUM SEALER

### TECHNICAL DETAILS

- 1) Available in three heights: 45, 36 or 15 cm.
- 2) Depending on the version, the internal chamber is big enough to contain traditional glass jars. Alternatively, it can be connected to external containers by means of the special adaptor provided.
- 3) Indispensable for vacuum cooking, Zero extends the storage life of food, both solid and liquid, up to fivefold.
- 4) Just like the automotive Bosch Pump, Zero transforms this power into the first domestic professional-standard built-in vacuum sealer.



## TECHNICAL SPECIFICATIONS

### ZERO 45

Voltage	120 V / 60 Hz / 1PH
Vacuum pump	8 m <sup>3</sup> /h
Vacuum pump capacity	2.113,38 Gal/H
Vacuum pump rate	450/680 W
Vacuum chamber volume	14 liters
Vacuum chamber dimension	W 12 29/32 in x H 5 15/64 in x D 12 3/4 in
Max.sealable width	11.8 inches
Vacuum capacity	99.9%
Residual pressure	<10 mbar
Chamber in	AISI 304 - 18/10 stainless steel
Made of	AISI 304 - 18/10 stainless steel
Vacuum level number	4 (Delicate / MIN / MED / MAX)
Absolute final pressure	Delicate = <700 mbar (10.152 psi) MIN= <300 mbar (4.351 psi) MED= <170 mbar (2.465psi) MAX= <10mbar (0.145 psi)
Max. power rate	730 W
Useful length of weld	11 13/16 in
Maximum side of the envelopes	L 11 13/16 in x H 13 25/32 in
Net weight	105 lb
Maximum operating drawer extraction	19 1/16 in
Max. absorbed power	500 W
Dimensions recessed element	Standard drawer module H 17 23/32 in x W 23 5/8 in Dimensions W 23 1/2 in x D 23 5/8 in x H 17 23/32 in
Net machine weight	105.8 lbs

## FINISHES

All Zero models can be customized with the following finishes: stainless steel, black glass, and De Castelli finishes

## STANDARD ACCESSORIES:



- Set of assorted vacuum bags:
  1. 0.9 x 7.8 x 9.8 inches bags
  2. 0.9 x 9.8 x 11.8 inches bags
- HDPE shelf
- External vacuum nozzle
- External vacuum connecting pipe

## INSTALLATION REQUIREMENTS

It comes with a power cord (59 inches long).

Provide a Type B socket behind the appliance.

## ZERO 45 BUILT IN

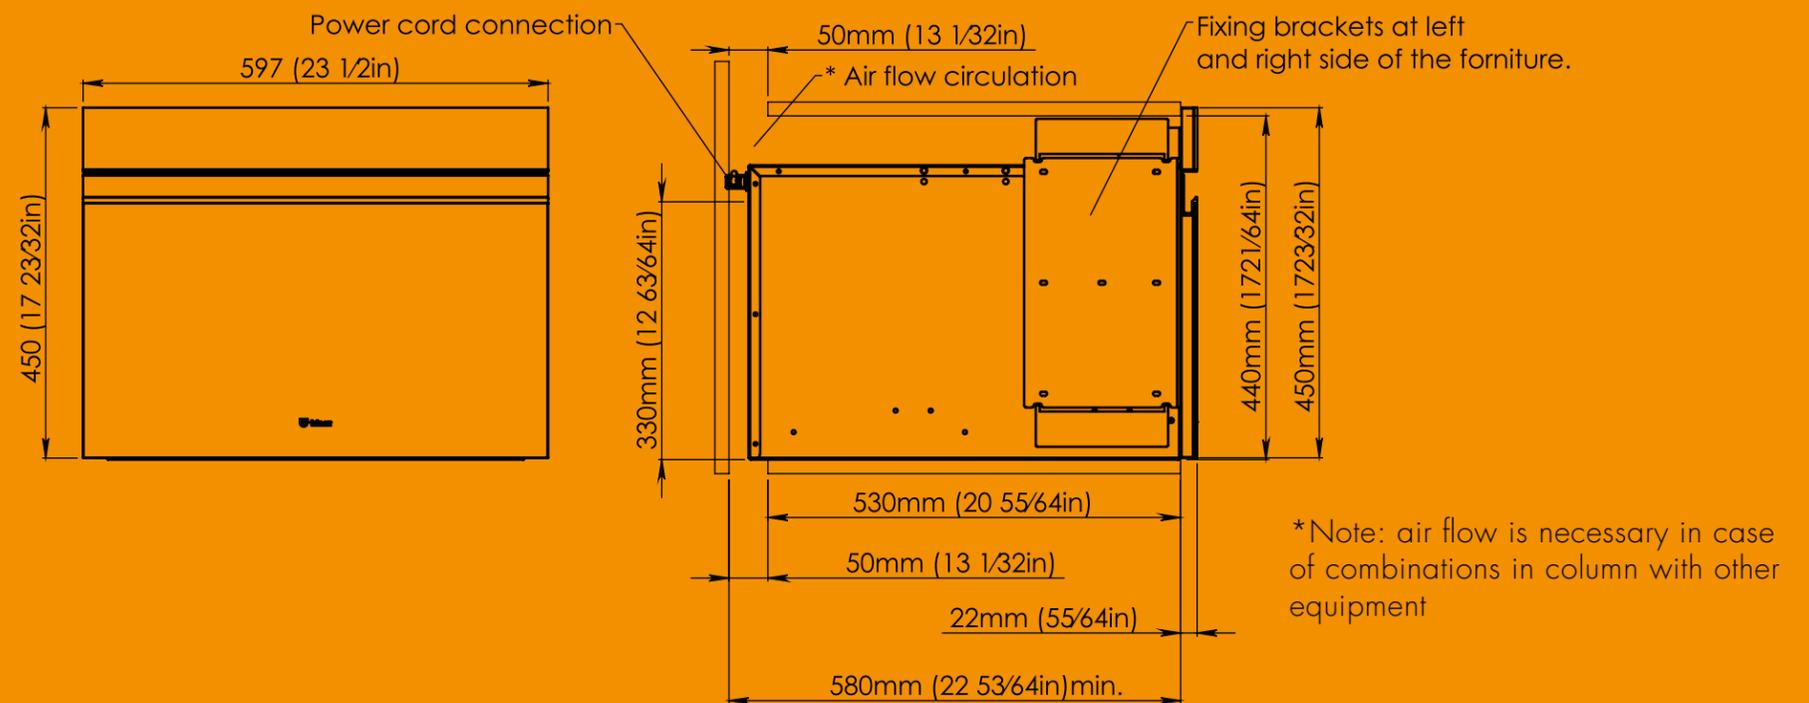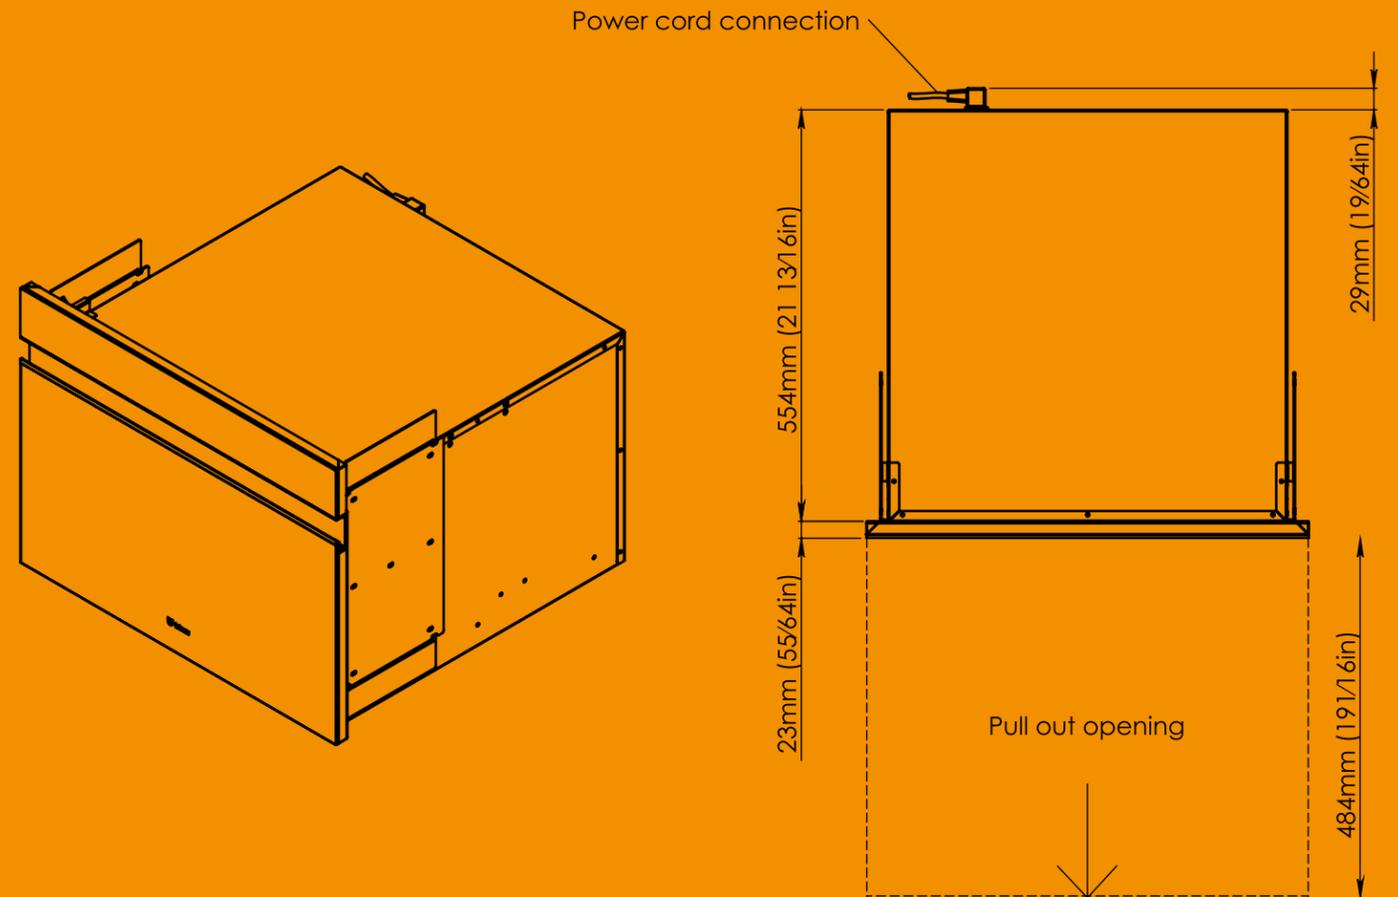

## TECHNICAL SPECIFICATIONS

### ZERO 36

Voltage	120 V / 60 Hz / 1PH
Vacuum pump	8 m <sup>3</sup> /h
Vacuum pump capacity	2.113,38 Gal/H
Vacuum pump rate	450/680 W
Vacuum chamber volume	14 liters
Vacuum chamber dimension	W 12 29/32 in x H 5 15/64 in x D 12 3/4 in
Max.sealable width	11.8 inches
Vacuum capacity	99.9%
Residual pressure	<10 mbar
Chamber in	AISI 304 - 18/10 stainless steel
Made of	AISI 304 - 18/10 stainless steel
Vacuum level number	4 (Delicate / MIN / MED / MAX)
Absolute final pressure	Delicate = <700 mbar (10.152 psi) MIN= <300 mbar (4.351 psi) MED= <170 mbar (2.465psi) MAX= <10mbar (0.145 psi)
Max. power rate	730 W
Useful length of weld	11 13/16 in
Maximum side of the envelopes	L 11 13/16 in x H 13 25/32 in
Net weight	99 lb
Maximum operating drawer extraction	19 1/16 in
Max. absorbed power	500 W
Dimensions recessed element	Standard drawer module H 14 11/64 in x W 23 5/8 in Dimensions W 23 1/2 in x D 23 5/8 in x H 5 15/64 in
Net machine weight	99.2 lbs

## FINISHES

All Zero models can be customized with the following finishes: stainless steel, black glass, and De Castelli finishes

## STANDARD ACCESSORIES:




- Set of assorted vacuum bags:
  1. 0.9 x 7.8 x 9.8 inches bags
  2. 0.9 x 9.8 x 11.8 inches bags
- HDPE shelf
- External vacuum nozzle
- External vacuum connecting pipe

## INSTALLATION REQUIREMENTS

It comes with a power cord (59 inches long).

Provide a Type B socket behind the appliance.

## ZERO 36 BUILT IN

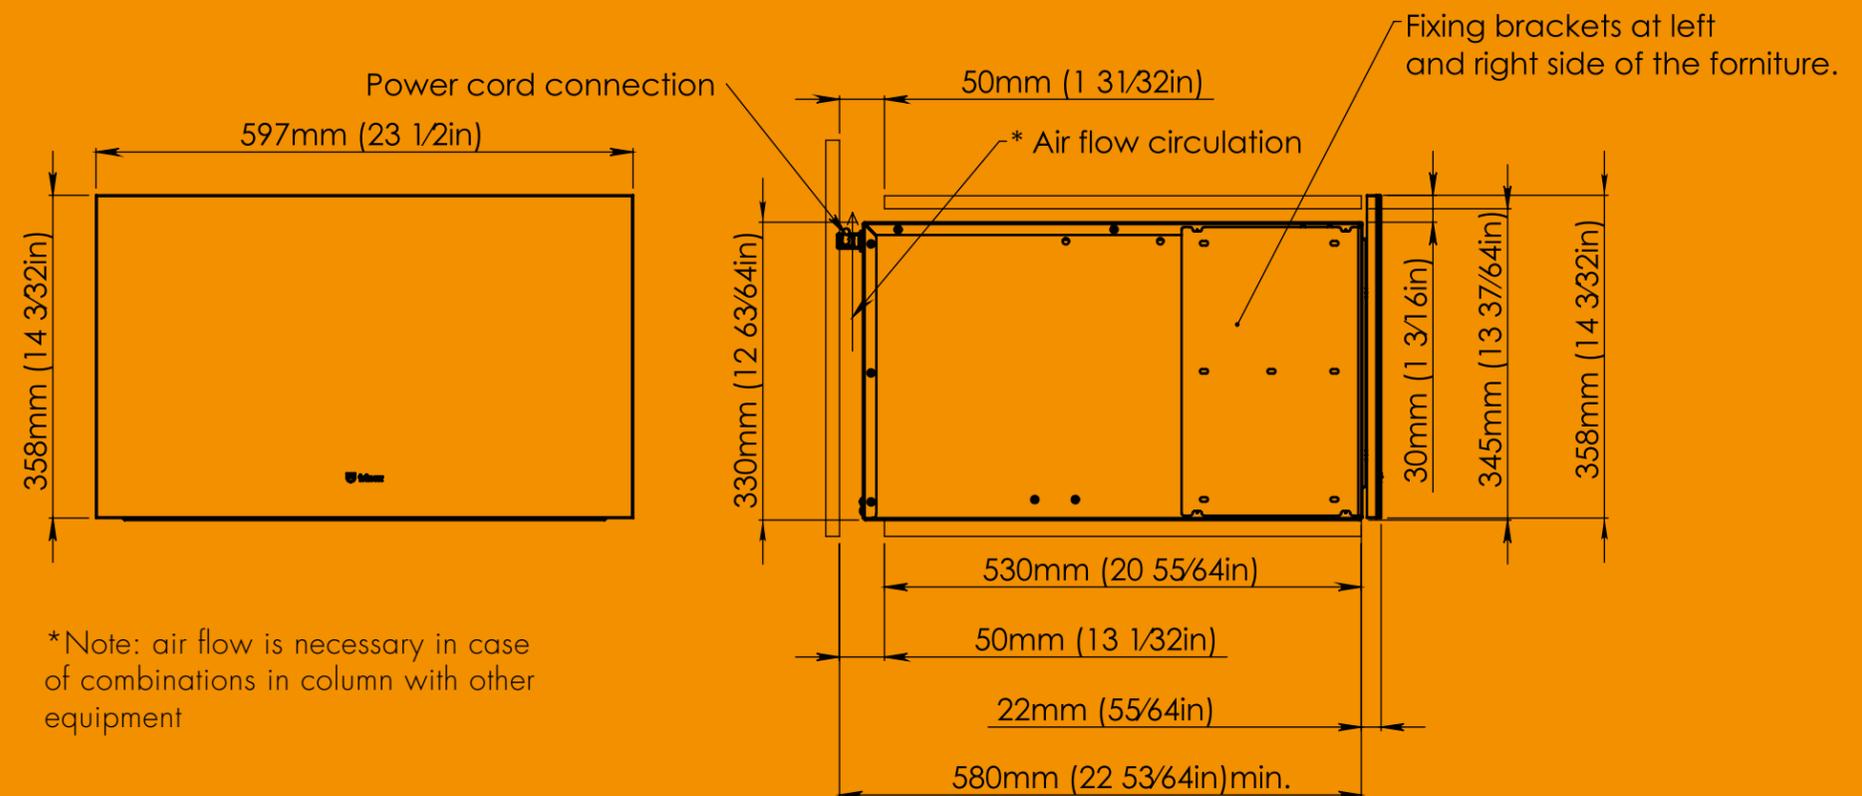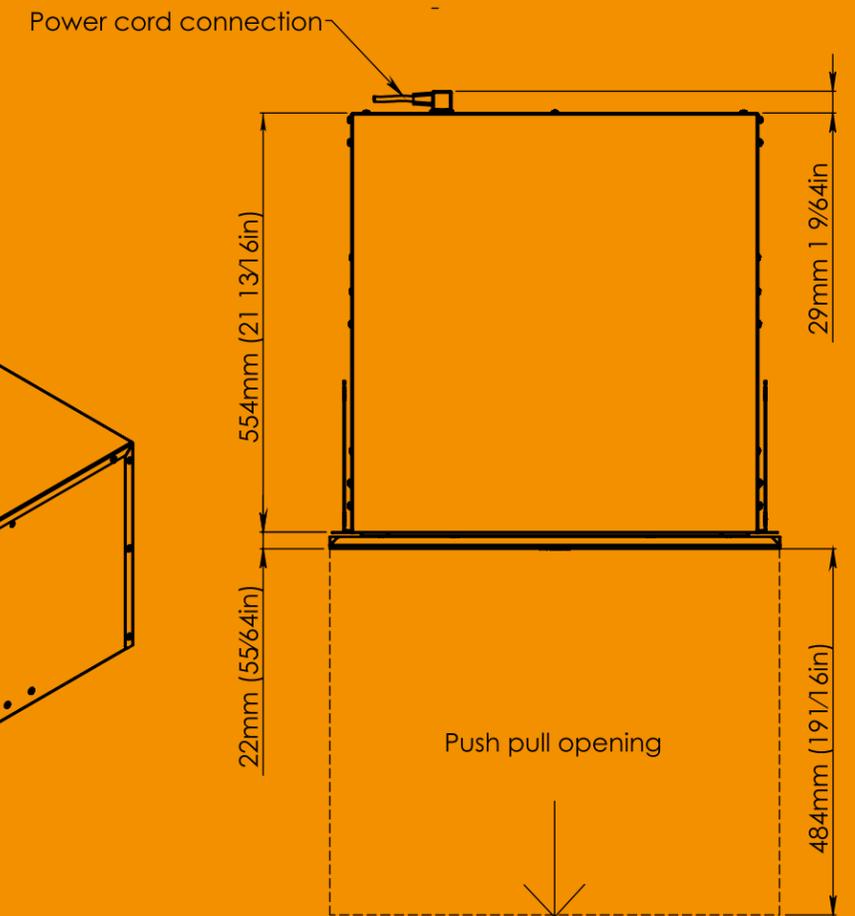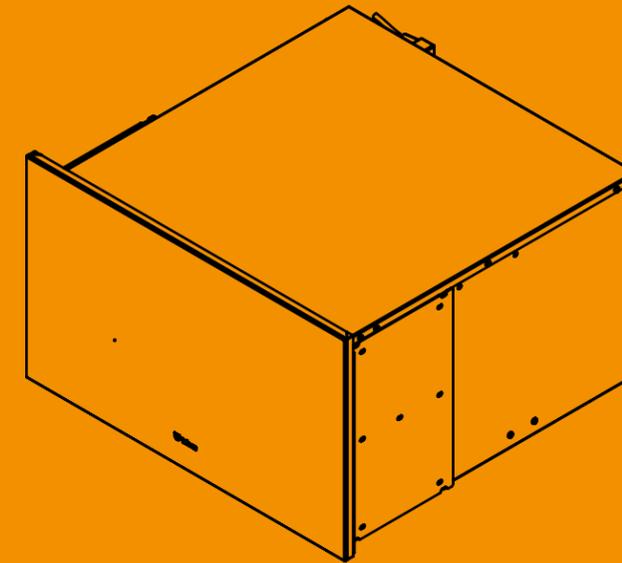

\*Note: air flow is necessary in case of combinations in column with other equipment

## TECHNICAL SPECIFICATIONS

### ZERO 15

Voltage	120 V / 60 Hz / 1PH
Vacuum pump	3 m <sup>3</sup> /h
Vacuum pump capacity	792,52 Gal/H
Vacuum pump rate	100/150 W
Vacuum chamber volume	7 liters
Vacuum chamber dimension	W 12 29/32 in x H 2 33/64 in x D 12 3/4 in
Max.sealable width	11.8 inches
Vacuum capacity	99.9%
Residual pressure	<10 mbar
Chamber in	AISI 304 - 18/10 stainless steel
Made of	AISI 304 - 18/10 stainless steel
Vacuum level number	4 (Delicate / MIN / MED / MAX)
Absolute final pressure	Delicate = <700 mbar (10.152 psi) MIN= <300 mbar (4.351 psi) MED= <170 mbar (2.465psi) MAX= <10mbar (0.145 psi)
Max. power rate	400 W
Useful length of weld	11 13/16 in
Maximum side of the envelopes	L 11 13/16 in x H 13 25/32 in
Net weight	79 lb
Maximum operating drawer extraction	191/16 in
Max. absorbed power	360 W
Dimensions recessed element	Standard drawer module H 5 29/32 in x W 23 5/8 in Dimensions W 23 1/2 in x D 23 5/8 in x H 5 19/32 in
Net machine weight	79.3 lbs

## FINISHES

All Zero models can be customized with the following finishes: stainless steel, black glass, and De Castelli finishes

## STANDARD ACCESSORIES:





- Set of assorted vacuum bags:
  1. 0.9 x 7.8 x 9.8 inches bags
  2. 0.9 x 9.8 x 11.8 inches bags
- HDPE shelf
- External vacuum nozzle
- External vacuum connecting pipe

## INSTALLATION REQUIREMENTS

It comes with a power cord (59 inches long).

Provide a Type B socket behind the appliance.

## ZERO 15 BUILT IN

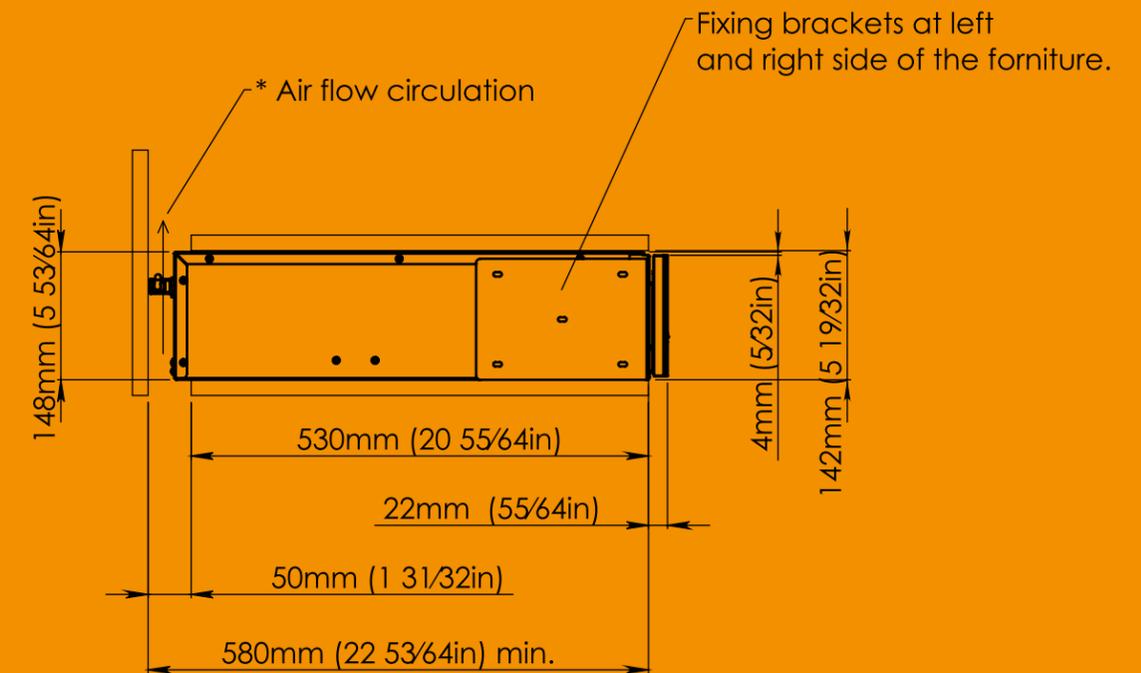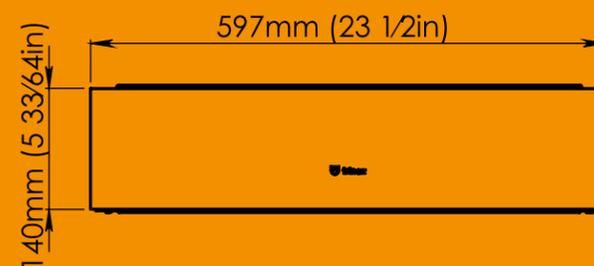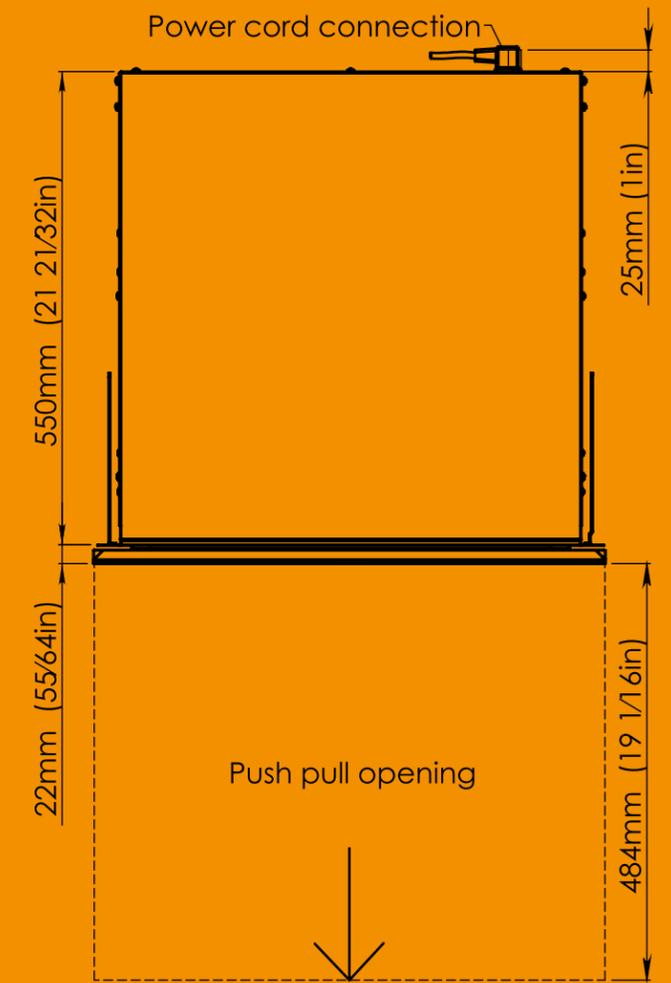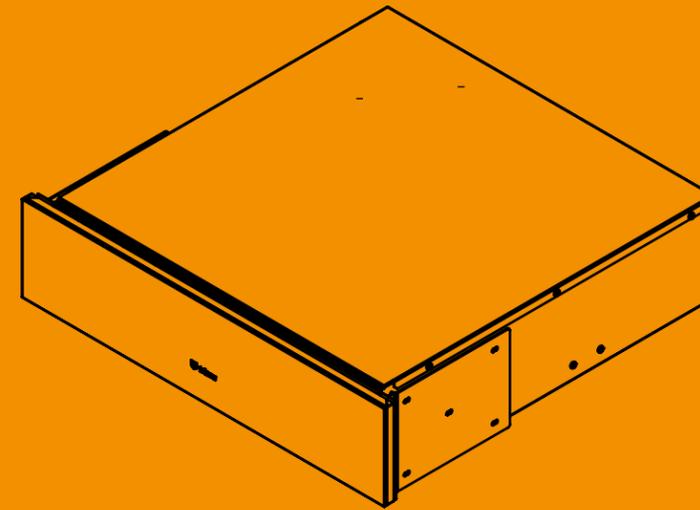

\*Note: air flow is necessary in case of combinations in column with other equipment